





TABLE OF CONTENTS

PLAYGROUND SURFACING	3
PlayBound Poured-in-Place	4-5
EverTop	6-7
PlayBound TurfTop	8-9
UltraTile Play	10-11
Contact Information	12





PLAYGROUND SURFACING



Surface America features the most complete line of bound playground surfacing in the world. Systems meet critical fall heights up to 13 feet per ASTM F-1292, which is the industry's standard test to evaluate a surfacing system's ability to absorb shock. They also conform to the requirements of the Americans with Disabilities Act and ASTM F-1951 Determination of Playground Surface Accessibility.

KEY ATTRIBUTES:

- Slip-resistant, abrasion-resistant, wear-resistant
- Porous design
- Many colors & color combinations, logos & graphics
- IPEMA-certified, ADA-compliant

IDEAL APPLICATIONS:


- Playgrounds
- Play Areas

SYSTEM TYPES:

- Poured Rubber
- Turf Roll over Poured Rubber Base
- Engineered Rubber Tile

SYSTEM: PLAYBOUND[™] POURED-IN-PLACE



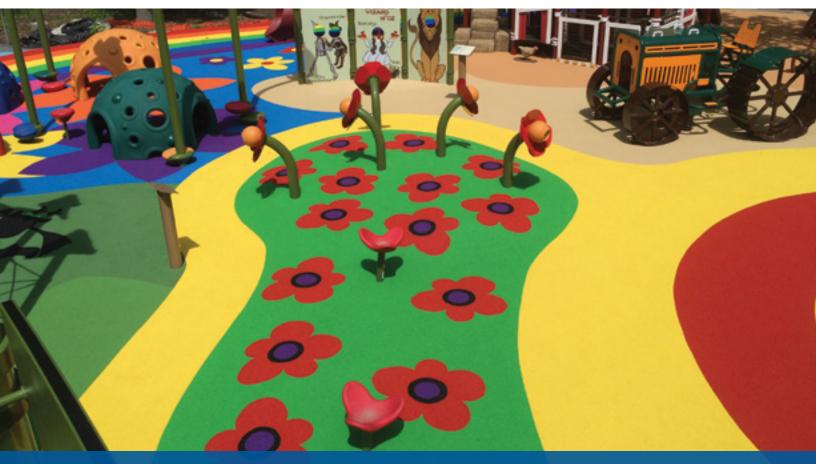

Surface America[®] PlayBound[™] Poured-in-Place at Watkins Regional Park in Upper Marlboro, MD

OVERVIEW:

- 2-layer porous system: SBR & polyurethane base, EPDM rubber & polyurethane top
- Mixed and troweled on site, so nearly endless design possibilities
- IPEMA certified & ADA compliant



Cross-section view

SYSTEM: PLAYBOUND[™] POURED-IN-PLACE



Since 1993, Surface America has completed thousands of projects and installed millions of square feet of recreational and athletic surfacing & flooring. Our projects are built to exacting specifications and guaranteed to meet expectations. We commonly fill the role of contract holder, project manager and certified installer. Surface America has the expertise and experience to play a significant role in the overall success of a project. Our staff can assist in design and planning, and manage the construction process as it relates to the installation of surfacing & flooring for recreational and athletic applications.



DATA:

- Field-applied in any configuration and dimensions
- Wet poured, two layers, troweled on site
- Base Layer: SBR (Styrene Butadiene Rubber) and polyurethane; Top Layer: EPDM (Ethylene Propylene Diene Monomer) rubber and polyurethane binder
- Typical thickness range is 1-3/4" to 5-1/2"
- Many colors and color combinations
- Porous: primarily outdoor use (indoor use less typical)
- Base Options: concrete, asphalt, crushed stone
- IPEMA certified: meets critical fall heights up to 13 feet per ASTM F-1292
- ADA compliant per ASTM F-1951 for playground surface accessibility
- Recycled material components sourced from the USA
- 7-Year Warranty (Super-7 with aromatic urethane)
- 10-Year Warranty (Extreme-10 with aliphatic urethane)

Specifications are subject to change without notice.











Surface America[®] EverTop[™] at Papa John Hospital in Iowa City, IA

OVERVIEW:

- 1-layer porous system: EPDM rubber & polyurethane
- Mixed and troweled on site, so nearly endless design possibilities & configurations
- Commonly used in play areas without equipment to achieve aesthetic consistency with top layer of PlayBound[™] Poured-in-Place at a lower cost



system: EVERTOP™



Since 1993, Surface America has completed thousands of projects and installed millions of square feet of recreational and athletic surfacing & flooring. Our projects are built to exacting specifications and guaranteed to meet expectations. We commonly fill the role of contract holder, project manager and certified installer. Surface America has the expertise and experience to play a significant role in the overall success of a project. Our staff can assist in design and planning, and manage the construction process as it relates to the installation of surfacing & flooring for recreational and athletic applications.

DATA:

- Field-applied in any configuration and dimensions
- Wet poured, one layer, troweled on site
- EPDM (Ethylene Propylene Diene Monomer) rubber and polyurethane binder
- Typical thickness is 1/2"
- Many colors and color combinations
- Porous: primarily outdoor use (indoor use less typical)
- Base Options: asphalt or concrete
- Recycled material components sourced from the USA
- ADA compliant per ASTM F-1951 for playground surface accessibility
- 7-Year Warranty (Super-7 with aromatic urethane)
- 10-Year Warranty (Extreme-10 with aliphatic urethane) Specifications are subject to change without notice.



SURFACEAMERICA



SYSTEM: PLAYBOUND[™] TURFTOP[™]





Surface America[®] PlayBound[™] TurfTop[™] at Los Olivos Park in Irvine, CA

OVERVIEW:

- Synthetic turf roll over poured SBR (rubber) basemat
- Natural grass look with no maintenance
- ADA compliant, abrasion-resistant, extremely durable



PLAYBOUND[™] TURFTOP[™]

SYSTEM:



Since 1993, Surface America has completed thousands of projects and installed millions of square feet of recreational and athletic surfacing & flooring. Our projects are built to exacting specifications and guaranteed to meet expectations. We commonly fill the role of contract holder, project manager and certified installer. Surface America has the expertise and experience to play a significant role in the overall success of a project. Our staff can assist in design and planning, and manage the construction process as it relates to the installation of surfacing & flooring for recreational and athletic applications.

DATA:

- Poured basemat and synthetic turf
- Partially or fully adhered
- 12' or 15' wide turf roll by custom lengths
- Green turf
- Porous
- Primarily outdoor use (indoor less typical)
- Base Options: concrete, asphalt, crushed stone
- IPEMA certified: meets 4' to 8' critical fall heights per ASTM F-1292
- ADA compliant per ASTM F-1951 for playground surface accessibility
- Manufactured in using recycled rubber from the USA

Specifications are subject to change without notice.












Surface America[®] UltraTile[®] Play under play equipment at park playground

OVERVIEW:

- 2-layer bonded rubber tile
- Ultra-durable top wear layer expected life of more than 100% longer than other rubber playground tiles
- IPEMA certified & ADA compliant



system: ULTRATILE® PLAY

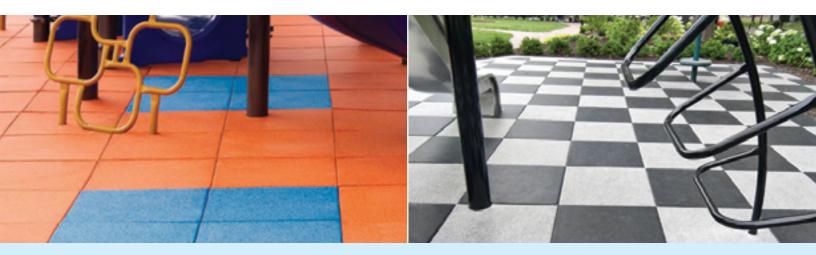

Since 1993, Surface America has completed thousands of projects and installed millions of square feet of recreational and athletic surfacing & flooring. Our projects are built to exacting specifications and guaranteed to meet expectations. We commonly fill the role of contract holder, project manager and certified installer. Surface America has the expertise and experience to play a significant role in the overall success of a project. Our staff can assist in design and planning, and manage the construction process as it relates to the installation of surfacing & flooring for recreational and athletic applications.



DATA:

- 24" x 24" x 2-1/2"
- Accessory pieces and ADA edges available
- Many standard colors (color combinations and designs available)
- Fully-adhered plus side-to-side bonding, or side-to-side bonding only
- Porous
- Indoor and outdoor use
- Base Options: concrete, asphalt, crushed stone
- IPEMA certified: meets 6' critical fall height per ASTM F-1292
- For 8' or 10' critical fall height, install 4' x 6' x 2-1/8" Ecore Polyfoam panels under tiles
- ADA compliant per ASTM F-1951 for playground surface accessibility
- Manufactured in using recycled rubber from the USA
- 10-Year Warranty for tiles, 8-Year Warranty for Polyfoam panels

Specifications are subject to change without notice.





800-999-0555 SurfaceAmerica.com

National Headquarters:

505 Aero Drive Cheektowaga, NY 14225 Phone: 716-632-8413 Fax: 716-632-8324

Mailing Address: PO Box 157 Williamsville, NY 14231

Regional Sales Offices are located throughout the United States.